


PCB Support Probe GKS-416

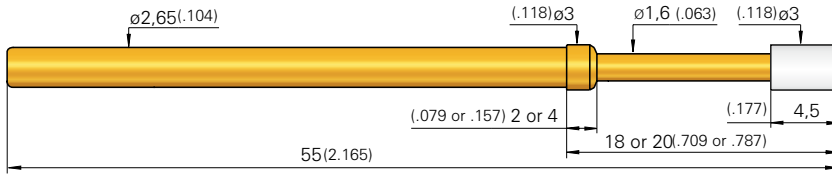

Ordering Example

GKS for Install. Height 18,0 mm (.709):

G	K	S	4	1	6	0	0	2	3	0	0	A	5	0	0	2
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

GKS for Install. Height 20,0 mm (.787):

G	K	S	4	1	6	0	0	2	3	0	0	A	5	0	0	4
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Mechanical Data

Working Stroke: 9,2 mm (.362)
Maximum Stroke: 11,5 mm (.453)
Spring Force at Work.Stroke: 5,0 N (18.1oz)


Materials

Plunger: BeCu , gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Tip: Delrin
Receptacle: KS-113 23

Mounting Hole Size

see GKS-113 (Page 58)

PCB Support Probe GKS-102

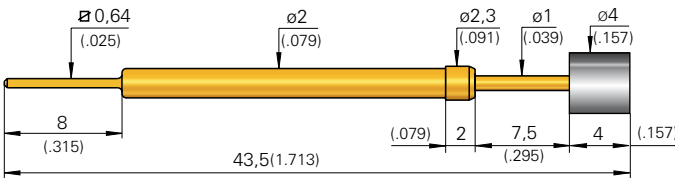

Ordering Example

GKS for Install. Height 13,5 mm (.531):

G	K	S	1	0	2	2	5	0	4	0	0	P	3	0	0	2	W
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Mechanical Data


Working Stroke: 4,8 mm (.189)
Maximum Stroke: 6,5 mm (.256)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz); 5,0 N (18.1oz)

Materials

Plunger: Steel , gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Tip: PVC
Receptacle: KS-102 23
Mounting Hole Size: see GKS-102, Page 56

Test Probe GKS-504

with continuous Plunger - for the activation of a Micro Switch

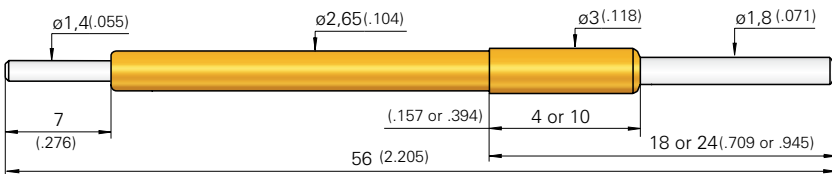

Ordering Example

GKS for Install. Height 18,0 mm (.709):

G	K	S	5	0	4	3	0	5	1	8	0	N	0	5	0	4
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

GKS for Install. Height 24,0 mm (.945):

G	K	S	5	0	4	3	0	5	1	8	0	N	5	0	1	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Mechanical Data

Working Stroke: 11,2 mm (.441)
Maximum Stroke: 14 mm (.551)
Spring Force at Work. Stroke: 0,5 N (1.8oz)
alternative: 3,0 N (10.8oz); 5,0 N (18.1oz)


Materials

Plunger: BeCu , nickel-plated
Barrel: Steel, gold-plated or Stainless Steel
Spring: Brass, gold-plated
Receptacle: KS-113 23

Mounting Hole Size

see GKS-113 (Page 58)

GND Probe GKS-414

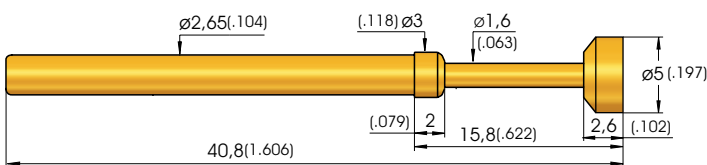

Ordering Example

GKS for Install. Height 15,8 mm (.622):

G	K	S	4	1	4	2	0	2	5	0	0	A	1	5	0	2
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

Mechanical Data

Working Stroke: 9,6 mm (.378)
Maximum Stroke: 11,2 mm (.441)
Spring Force at Work. Stroke: 1,5 N (5.4oz)
alternative: 3,0 N (10.8oz)
Recaptacle: KS-113 23 (see Page 56)

Mounting Hole Size

see GKS-113 (Page 58)